



Hinged Versa Mount Bracket

Installation Instructions

Item # Ezc-VMBH | The **EZ Claw Hinged Versa Mount Bracket** features a reinforced hinge assembly that pivots 45 degrees in either direction to provide additional hose travel.

Kit Includes:

(1) Hinged Versa Mount Bracket

(1) 5/16" Hardware Kit

Recommended Tools for Installation:

(1) Battery-powered Drill

(1) 1/4" Drill Bit

(1) 17/32" Drill Bit


(1) Rivet Nut Tool (EZCRNIT)

(1) 1/2" Socket

(1) 9/16" Socket

(1) 9/16" Open Ended Wrench

(1) Permanent Marker or Center Punch

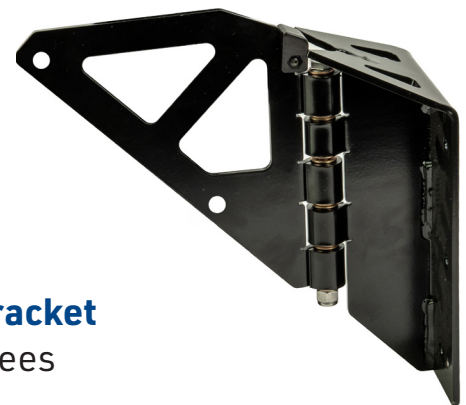

Installation Instructions



1 Locate Cab Structure.

Select a mounting location on the driver side a minimum of 5-1/2' above the catwalk.



2 Mark Hole Locations.

It may be necessary to drill out one rivet and use as a mounting hole to ensure the bracket is flush. Hold the bracket level in the selected position and mark all four mounting holes.



3 Drill Pilot Holes.

Using a 1/4" bit, carefully drill pilot holes in the center of each mark (being careful not to plunge into insulation, wires, etc.). Drill out the pilot holes using a 17/32" drill bit.



5 Install Rivet Nuts.

Install four rivet nuts using a Rivet Nut Tool (EZCRNIT).



6 Mount Bracket.

Mount the EZ Claw bracket using 5/16" bolts (included).



7 Install Line Saver.

Mount the EZ Claw Line Saver utilizing the 3/8" mounting hardware supplied with the Line Saver.



8 Attach Hose Assembly.

Using an EZ Claw Sling (EZCS) or Hose & Cable Block (EZCHCH38), attach the EZ Claw Line Saver cable to the hose assembly.